

Tsunami® MP-10250-BSX

Advanced Point-to-Multipoint Wireless Base Station

Designed to Maximize Bandwidth and Link Reliability in Noisy Environments

The Tsunami® MP-10250-BSX is an intelligent base station that implements a beam steering (BeamX™) antenna and a secondary, look-ahead scan radio (SmartScan™) to mitigate interference and take full advantage of the high throughput capability of the Tsunami® 10000 product line. This product is extremely robust in the face of high ambient RF interference, delivers more Mbps at a given point in the network and opens up additional 5GHz spectrum.

The Tsunami® MP-10250-BSX supports the following features for applications that include last mile access or video surveillance, both of which need uninterrupted high speed, and prioritized broadband wireless access:



Proxim WORP®, combines network access control, data scheduling, advanced QoS and encryption to ensure highly efficient and secure data transmission.



Proxim ClearConnect™, a suite of interference mitigation technologies ensuring robust and reliable communications in high-density wireless deployments.





Proxim SmartConnect™, delivering exceptional performance in noisy RF locations by combining a beam steering antenna with a secondary look ahead scan radio to seek, manage and select the best channel.

Fast, Secure and Flexible

- Point-to-Multipoint base station that delivers up to 866 Mbps data rate and covers distances up to 10 miles (16 km)
- AES 128 encryption, Radius authentication and highly-secure remote management via SSL/TLS1.2, SSH and SNMPv3
- Service flow based QoS with deep packet inspection (DPI) to ensure that the most important data arrives with priority
- Built-in feature rich network protocols for IPv4 and IPv6 bridging, routing and gateway functionality


Proxim SmartScan™

- Performs background analysis of the full RF spectrum and creates channel availability tables to allow an immediate switch to a free channel in case of weather radar detection or heavy interference
- By removing the initial transmission delay, SmartScan makes DFS channel more efficient
- It also opens access to the 5.600–5.650 GHz sub-band, and enables effective use of up to 355 MHz of DFS spectrum

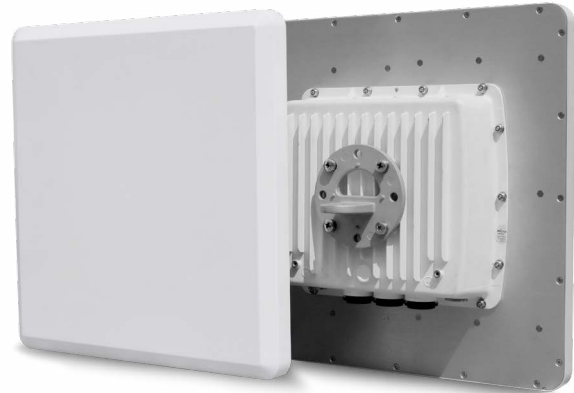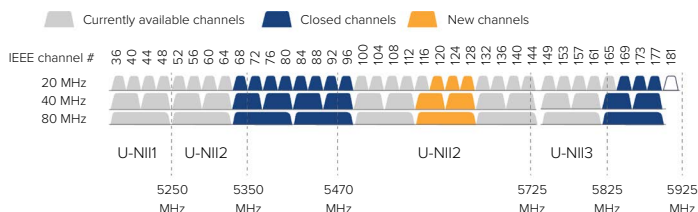

BeamX™ Antenna

- Smart antenna delivering a 17° beam that electronically steers itself to the remote subscriber unit over a 60° sector, to limit interference from nearby RF sources
- By improving the radio Signal to Noise Ratio (SNR), BeamX enables higher modulations and thus improves throughput

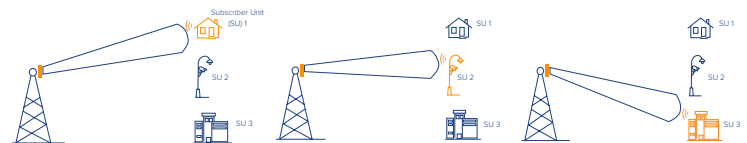

Rugged and Reliable

Designed for harsh environments, the Tsunami® MP-10250-BSX is fully IP67 rated, and will deliver years of reliable service in conditions that include, high winds, high salt, and high temperature extremes.

Product Line Compatibility

- Connects to all existing Tsunami® MP/XP 10100, MP-10100L, MP-8200, MP-820 and MP-830 products
- Fully integrates within ProximVision® Advanced Cloud Based Carrier Management System and Controller

About Proxim Wireless

Proxim Wireless is a pioneer and global leader in advanced Wi-Fi, point to point, and point to multipoint outdoor wireless systems that deliver high performance and high availability communications.

With over 30 years of wireless experience, Proxim is recognized for its unparalleled reliability, superior performance and drive for innovation.

PRODUCT MODELS		PART NUMBERS	
MP-10250-BSX	Tsunami® MP 10250 Base Station Unit, 867 Mbps, MIMO 2x2, 16 dBi BeamX antenna, scan radio	901-00291 MP-10250-BSX-US	901-00292 MP-10250-BSX-WD
INTERFACES			
WIRED ETHERNET	Two auto MDI-X RJ45 10/100/1000Mbps Ethernet (Port #1 with PoE in & Data, Port #2 with PoE out & Data)		
WIRELESS PROTOCOL	WORP® (Wireless Outdoor Router Protocol)		
RADIO & TX SPECS			
MIMO	2x2:2 and 0x2:2 (scan radio)		
MODULATION	OFDM with BPSK, QPSK, QAM16, QAM64, QAM256		
FREQUENCY	4.900 – 5.850 GHz (Subject to Country Regulations)		
CHANNEL SIZE	80 MHz, 40 MHz and 20 MHz		
DATA RATE	MCS 0 to 9 with Dynamic Data Rate Selection		
TX POWER	Up to 28 dBm (dual chain)		
TX POWER CONTROL	0 - 27 dB, in 1 dB steps. Automatic TPC with configurable EIRP limit		
TX POWER	80 MHz	40 MHz	20 MHz
	MCS0: 28 MCS9: 21	MCS0: 28 MCS9: 22	MCS0: 29 MCS8: 25
RX SENSITIVITY (Per=10%)	MCS0: -89 MCS9: -68	MCS0: -93 MCS9: -71	MCS0: -94 MCS8: -74
	Scan Radio		N/A
THROUGHPUT	Up to 672 Mbps	Up to 324 Mbps	Up to 137 Mbps
OTHER	Dynamic Channel Selection (DCS) based on interference detection. Dynamic Frequency Selection (DFS) based on radar signature. Automatic Transmit Power Control (ATPC) with EIRP limit support.		
ANTENNA			
MP-10250-BSX	Integrated 2x2 MIMO Beam Steering antenna: Beam Width 17° spanning over ± 30° sector Receive Gain 16 dBi (11 dBi before 5.150 GHz) Transmit Gain 20 dBi (11 dBi before 5.150 GHz)		
MANAGEMENT			
REMOTE	Telnet and SSH, Web GUI and SSL, TFTP, SNMPv3		
SNMP	SNMP v1-v2c-v3, RFC-1213, RFC-1215, RFC-2790, RFC-2571, RFC-3412, RFC-3414, Private MIB		
OTHER	Syslog, sFlow™ agent, SNMP and local time, Spectrum analyzer		
SYNCHRONIZATION			
	Pass-through IEEE 1588v2 Ethernet Synchronization		
SECURITY			
ENCRYPTION	AES 128		
AUTHENTICATION	Internal MAC Address Control List, Radius based Authentication (with VLAN and QoS provisioning)		
QoS			
	Asymmetric Bandwidth Control	Asymmetric UL/DL committed and maximum information rate per service flow	
	Packet Classification Capabilities	802.1p priority, IPTOS, VLAN ID, IP addresses, ports, Ethernet addresses, IP protocol, and EtherType	
	Scheduling	Best Effort, Real Time Polling Services	
NETWORK			
MODES	Bridging, Routing (RIP v2 and IP tunneling)		
IP STACK	IPv4 and IPv6 simultaneously		
GATEWAY FEATURES	DHCP Server & relay, NAT with Std ALGs, PPPoE end point with Proxy DNS		
VLAN	802.1Q: Management VLAN. Transparent, Access, Trunk and Mixed mode. QinQ double tagging		
POWER		INPUT	OUTPUT
		36 to 57 VDC via Ethernet port1 (Power over Ethernet) 12 VDC via Access port Power should not be provided simultaneously on both ports	48 to 57 VDC – 25 Watt on Ethernet port2 (PoE – software controlled) 12 VDC on Access port
POWER CONSUMPTION			
30 Watt typical, 40 Watt maximum			
ENVIRONMENTAL SPECS			
OPERATING TEMPERATURE		STORAGE TEMPERATURE	HUMIDITY, IP RATING
-40° to 60°C (-40° to 140° Fahrenheit)		-50° to 70°C (-58° to 158° Fahrenheit)	100% relative humidity - IP67
			WIND LOADING
			200 km/h (125 mph)
PHYSICAL SPECS			
PRODUCT MODELS	DIMENSIONS PACKAGED (per unit)	DIMENSIONS UNPACKAGED (per unit)	WEIGHT (PACKAGED)
MP-10250-BSX	18.46 x 7.05 x 21.57 in (469 x 179 x 548 mm)	14 x 14 x 3.40 in (371 x 371 x 85 mm)	13.67 lbs (6.2 kg)
			WEIGHT (UNPACKAGED)
			7.27 lbs (3.3 kg)
SAFETY STANDARDS			
UL 60950, CAN/CSA-C22.2 No. 60950, IEC 60950, EN 60950 (part -1 and -22)			
CERTIFICATIONS			
USA: FCC 90Y + 15E (UNII 15.247), Canada: IC RSS 102 + RSS 111 + RSS 247, Europe: RED EN 301 489-1 + EN 301-489-17 + EN 301 893 + EN 302 502			
PACKAGE CONTENTS			
<ul style="list-style-type: none"> One Tsunami® MP-10250-BSX with integrated BeamX antenna and scan radio One power injector and country specific power cord One Connector weatherproofing kit (Includes all recommended weatherproofing material) One Wall / Pole mounting kit 		<ul style="list-style-type: none"> One Antenna alignment (RJ11) dongle One Grounding kit One Quick Installation Guide 	
MTBF & WARRANTY			
MTBF over 250 000 hours & 2-year warranty with ServPak Extended Support available			