



Six Feet Low Loss Coaxial Antenna Cable


Features

- LSR240 cable
- One Reverse Polarity SMA connector
- One Right-Angle N-Type connector

Technical Specifications

ELECTRICAL		MECHANICAL	
FREQUENCY RANGE	DC to 6.5 GHz	CONNECTOR 1	Reverse Polarity SMA Male
VSWR	1.13:1 @ 2 GHz 1.17:1 @ 5 GHz 1.25:1 @ 6.5 GHz	CONNECTOR 2	Right Angle N-Type Male
INSERTION LOSS	-0.6 dB @ 2 GHz -1.0 dB @ 5 GHz -1.4 dB @ 6.5 GHz	LENGTH	6 feet / 1.83 m
RETURN LOSS	-24 dB @ 2 GHz -22 dB @ 5 GHz -19 dB @ 6.5 GHz	DIAMETER	0.240 inch / 6.1 mm
IMPEDANCE	50 Ohms	WEIGHT	0.3 lbs / 140 g
MAX VOLTAGE	1500 VMS	ENVIRONMENTAL	
		TEMPERATURE RANGE	-40 to +125 °Celsius
		COMPLIANCE	
		RoHS	Compliant

Drawing

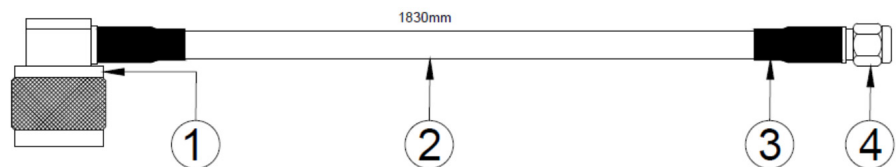

Item	
1	N-Type Male Connector
2	LSR240 Cable – Black
3	Heat shrinkable tube – Black
4	RP-SMA Male connector